



UNIQUE TRACTOR

ZHENGZHOU UNIQUE INDUSTRIAL EQUIPMENT CO., LTD



Zhengzhou Unique Industrial Equipment Co., Ltd
Add: High & New Technology Industrial Development Zone, Zhengzhou, Henan, P.R.China
Tel: 0086-371-63699132
Fax: 0086-371-63935058
Email: uniquemachine@yahoo.com.cn
[Http://www.unique-tractor.com](http://www.unique-tractor.com)

BRIEF INTRODUCTION

Zhengzhou Unique Industrial Equipment Co., Ltd. is located in Zhengzhou City, Henan Province, China. Our company is developed to be a high-Tech enterprise with scientific research, manufacture, selling service.

We produce different model of tractors from 18hp -130hp, include 2WD and 4WD, such as hot models UT400/404/550/554 and UT704/804/904/1004/1104 etc. They are marketing in all parts of China and around the world.

Our company has been certificated with ISO9001, and most of our tractors and Implements have passed CE certificated, which can match international standard. The products are good in quality and excellent in services, which have being sold very well all over the China and exported to more than 30 countries and regions, such as Asia, Africa, Peru, Chile, Panama, Europe, Australia etc.

With novel and unique Color for the appearance, beautiful and smooth model, delicate design, also we produce different style of tractor hood to meet different market demands.

We at UNIQUE are looking forward to cooperating with customers worldwide to create a better future. Warm welcome to UNIQUE.

厂
房
介
绍

WORKSHOP VIEW



CUSTOMERS VISIT

客户来访





UT20-35HP 2WD Series Tractors

MODEL	UT200	UT250	UT300	UT350
Overall size(LxWxH)mm	2705 X1296 X 1388	2705 X1296 X 1388	2705 X1296 X 1388	2705 X1296 X 1388
Wheel base(mm)	1559	1559	1559	1770
Minimum ground clearance(mm)	320	330	330	223
Front tire	4.00-16	4.00-16	4.00-16	5.00-16
Rear tire	8.3-24	8.3-24	8.3-24	9.5-24
Drive type	4X 2	4X 2	4X 2	4X 2
Engine				
Engine Model	JD295	JD295	JD2102	4L22
Type of engine	Water cooled, vertical, direct injection, 2/3/4 cylinder engine			
Capacity of fuel tank(L)	21	21	21	21
Engine power	14.8	18.4	22.1	25.8
PTO power at rated speed	2400	2400	2400	2350
Clutch	Single stage clutch			
PTO speed	540rpm or 720rpm or 540/1000rpm			
Gear shift	6F+ 2R or 8F+2F			
Hydraulic output valve	Two-way or multi-way optional			
Category of 3-point link	0	I	I	I
Lifting force(at point of 610mm)KN	4.5	5.7	5.9	6.5
Speed (Km/h)	2.42-29.83	2.42-29.83	2.42-29.83	2.42-29.83





UT20-35HP 4WD Series Tractors

MODEL	UT204	UT254	UT304	UT354
Overall size(LxWxH)mm	3046 x 1440 x1414	3046 x 1440 x1414	3046 x 1440 x1414	3168x 1560 x 1980
Wheel base(mm)	1598	1598	1598	1772
Minimum ground clearance(mm)	266	318	318	223
Front tire	6.00-12	6.00-12	6.00-12	6.00-16
Rear tire	8.3-24	8.3-24	8.3-24	9.5-24
Drive type	4x4	4x4	4x4	4x4
Engine				
Engine Model	JD295	JD295	JD2102	4L22
Type of engine	Water cooled, vertical, direct injection, 2/3/4 cylinder engine			
Capacity of fuel tank(L)	21	21	21	21
Engine power	14.8	18.4	22.1	25.8
PTO power at rated speed	2400	2400	2400	2350
Clutch	Single stage clutch			
PTO speed	540rpm or 720rpm or 540/1000rpm			
Gear shift	6F+ 2R or 8F+2F			
Hydraulic output valve	Two-way or multi-way optional			
Category of 3-point link	0	I	I	I
Lifting force(at point of 610mm)KN	6	7.2	7.4	7.4
Speed (Km/h)	2.42-29.83	2.42-29.83	2.42-29.83	2.42-29.83





UT40-60HP 2WD Series Tractors

MODEL	UT400	UT450	UT500	UT550	UT600
Overall size(LxWxH)mm	3513x1750x2130	3513x1750x2130	3513x1750x2130	3513x1750x2130	3868x1614x2330
Wheel base(mm)	1880	1880	1880	1880	1880
Mininum ground clearance(mm)	400	400	400	400	400
Front tire	6.0-16	6.0-16	6.0-16	6.0-16	6.0-16
Rear tire	12.4-28/14.9-24(optional)				
Drive type	4x2	4x2	4x2	4x2	4x2
Engine					
Engine Model	490BT	490BT	495BT	495BT	SL4105
Type of engine	Vertical, direct injection, water cooled, 4 cylinder, 4 Stroke diesel engine				
Capacity of fuel tank(L)	38L	38L	38L	38L	38L
Engine power	29.4	33.1	36.8	38.2	44.1
PTO power at rated speed	2200	2200	2300	2300	2300
Clutch	Dry, dual-stage type				
PTO speed	540/760rpm				
Gear shift	8F+4R/16F+8R(Optional)				
Hydraulic output valve	Multi-way Valve (optional)				
Category of 3-point link	rear, category I		rear, category II		
Lifting force(at point of 610mm)KN	9				
Speed (Km/h)	2.6-34.78				



UT40-60HP 4WD Series Tractors

MODEL	UT404	UT454	UT504	UT554	UT604
Overall size(LxWxH)mm	3513x1750x2130	3513x1750x2130	3513x1750x2130	3513x1750x2130	3868x1614x2330
Wheel base(mm)	1924	1924	1924	1924	2060
Minimum ground clearance(mm)	325	325	325	325	305
Front tire	8.3-20	8.3-20	8.3-20	8.3-20	8.3-20
Rear tire	12.4-28/14.9-24(optional)				
Drive type	4x4	4x4	4x4	4x4	4x4
Engine					
Engine Model	490BT	490BT	495BT	495BT	SL4105
Type of engine	Vertical, direct injection, water cooled, 4 cylinder, 4 Stroke diesel engine				
Capacity of fuel tank(L)	38L	38L	38L	38L	38L
Engine power	29.4	33.1	36.8	38.2	44.1
PTO power at rated speed	2200	2200	2400	2400	2400
Clutch	Dry, dual-stage type				
PTO speed	540/760rpm				
Gear shift	8F+4R/16F+8R(Optional)				
Hydraulic output valve	Multi-way Valve (optional)				
Category of 3-point link	rear, category I		rear, category II		
Lifting force(at point of 610mm)KN	12	12	12	12	12
Speed (Km/h)	2.6-34.78				





UT70-80HP 2WD Series Tractors

MODEL	UT700	UT750	UT800B	UT850B
Overall size(LxWxH)mm	4010X1929X2568	4010X1929X2568	4010X1929X2568	4010X1929X2568
Wheel base(mm)	2236	2236	2236	2236
Minimum ground clearance(mm)	430	430	430	430
Front tire	6.5-20	6.5-20	6.5-20	6.5-20
Rear tire	14.9-30			
Drive type	4x2	4x2	4x2	4x2
Engine				
Engine	YTO or Yuchai Brand			
Type of engine	Vertical, direct injection, water cooled, 4 cylinder, 4 Stroke diesel engine			
Capacity of fuel tank(L)	78L	78L	78L	78L
Engine power	51.5KW	55KW	59KW	62.5KW
PTO power at rated speed	2200	2200	2300	2300
Clutch	Dry, dual stage type	Dry, dual stage type	Dry, dual stage type	Dry, dual stage type
PTO speed	760rpm			
Gear shift	8F+4R / 16F+8R(Optional)/8F+8R (Optional)			
Hydraulic output valve	Multi-way Valve (optional)			
Category of 3-point link	II	II	II	II
Lifting force(at point of 610mm)KN	13.5	13.5	14	16.6
Speed (Km/h)	3.20-32.92			





UT70-80HP 4WD Series Tractors

MODEL	UT704	UT754	UT804B
Overall size(LxWxH)mm	4010X1929X2568	4010X1929X2568	4010X1929X2568
Wheel base(mm)	2236	2236	2236
Minimum ground clearance(mm)	340	340	340
Front tire	8.3-24	8.3-24	8.3-24
Rear tire	14.9-30		
Drive type	4x4	4x4	4x4
Engine			
Engine	YTO or Yuchai Brand		
Type of engine	Vertical, direct injection, water cooled, 4 cylinder, 4 Stroke diesel engine		
Capacity of fuel tank(L)	78L	78L	78L
Engine power	51.5KW	55KW	59KW
PTO power at rated speed	2200	2200	2300
Clutch	Dry,dual stage type	Dry,dual stage type	Dry,dual stage type
PTO speed	760rpm		
Gear shift	8F+4R /16F+8R(Optional)/8F+8R (Optional)		
Hydraulic output valve	Multi-way Valve (optional)		
Category of 3-point link	II	II	II
Lifting force(at point of 610mm)KN	15	15	16.9
Speed (Km/h)	3.20-32.92		





UT80-95HP 2WD Series Tractors

MODEL	UT800	UT850	UT900	UT950
Overall size(LxWxH)mm	4593 x2050 x2810	4593 x2050 x2810	4593 x2050 x2810	4593 x2050 x2810
Wheel base(mm)	2192	2192	2192	2192
Minimum ground clearance(mm)	466	466	466	466
Front tire	7.5-20	7.5-20	7.5-20	7.5-20
Rear tire	16.9-34			
Drive type	4x2	4x2	4x2	4x2
Engine				
Engine	YTO or Yuchai Brand			
Type of engine	Vertical, direct injection, water cooled, 4 cylinder, 4 Stroke diesel engine			
Capacity of fuel tank(L)	150L	150L	150L	150L
Engine power	59KW	62.5KW	66.2KW	70KW
PTO power at rated speed	2300	2400	2300	2300
Clutch	Dry,dual stage type			
PTO speed	540/1000rpm,(760/1000rpm optional)			
Gear shift	8F+4R /16F+8R(Optional)/8F+8R (Optional)			
Hydraulic output valve	Multi-way Valve (optional)			
Category of 3-point link	II	II	II	II
Lifting force(at point of610mm)KN	19.5	19.5	19.5	20.1
Speed (Km/h)	2.31-34.85			





UT80-95HP 4WD Series Tractors

MODEL	UT804	UT854	UT904	UT954
Overall size(LxWxH)mm	4593 x2050 x2810	4593 x2050 x2810	4593 x2050 x2810	4593 x2050 x2810
Wheel base(mm)	2193.5	2193.5	2193.5	2193.5
Minimum ground clearance(mm)	389	389	389	389
Front tire	11.2-24	11.2-24	11.2-24	11.2-24
Rear tire	16.9-34			
Drive type	4x4	4x4	4x4	4x4
Engine				
Engine	YTO or Yuchai Brand			
Type of engine	Vertical, direct injection, water cooled, 4 cylinder, 4 Stroke diesel engine			
Capacity of fuel tank(L)	150L	150L	150L	150L
Engine power	59KW	62.5KW	66.2KW	70KW
PTO power at rated speed	2300	2400	2300	2300
Clutch	Dry,dual stage type			
PTO speed	540/1000rpm,(760/1000rpm optional)			
Gear shift	8F+4R /16F+8R(Optional)/8F+8R (Optional)			
Hydraulic output valve	Multi-way Valve (optional)			
Category of 3-point link	II	II	II	II
Lifting force(at point of610mm)KN	19.5	19.5	19.5	20.1
Speed (Km/h)	2.31-34.85			





UT100HP Series Tractors

MODEL	1004	1104	1000	1100
Overall size(LxWxH)mm	4593 x2050 x2810			
Wheel base(mm)	2193.5	2193.5	2192	2192
Mininum ground clearance(mm)	415	415	498.5	498.5
Front tire	11.2-24 (12.4-24 optional)		7.5-20	
Rear tire	16.9-34 (18.4-34 optional)		16.9-34	
Drive type	4x4	4x4	4x2	4x2
Engine				
Engine	YTO or Yuchai Brand			
Type of engine	Vertical, direct injection, water cooled, 4 cylinder, 4 Stroke diesel engine			
Capacity of fuel tank(L)	150L	150L	150L	150L
Engine power	73.5KW	81KW	73.5KW	81KW
PTO power at rated speed	2300	2400	2300	2400
Clutch	Dry,dual stage type			
PTO speed	540/1000rpm,(760/1000rpm optional)			
Gear shift	8F+4R /16F+8R(Optional)/8F+8R (Optional)			
Hydraulic output valve	Multi-way Valve (optional)			
Category of 3-point link	II	II	II	II
Lifting force(at point of610mm)KN	20.3	22.3	18.7	19.8
Speed (Km/h)	2.42-36.39			


Farm Machinery



Trailer



Screw Oil Press

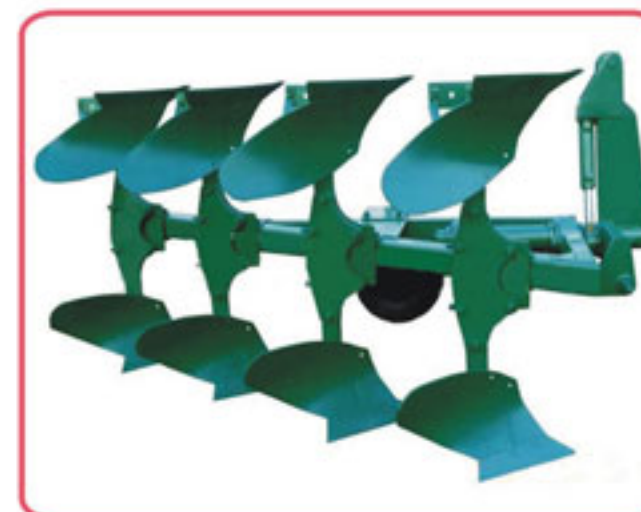

Swivel Plough



Share Plough



Front End Loader



Hydraulic Oil Press



GQN Series Rotary Tiller



Potato Harvester



Mower



SGTN Series Rotary Tiller



Wood Chipper



Stick Rake



Sprayer



Spring Cultivator



Backhoe



Box Scraper



Log Splitter



Corn Planter



Disc Harrow



Hole Digger



Front Dozer



Disc Plough



Potato Planter